

NEW



100,000 HOURS



5 YEAR WARRANTY



NEXT DAY DELIVERY




IP66



ECA

EXTERIOR RANGE

ROKER FLOODLIGHT

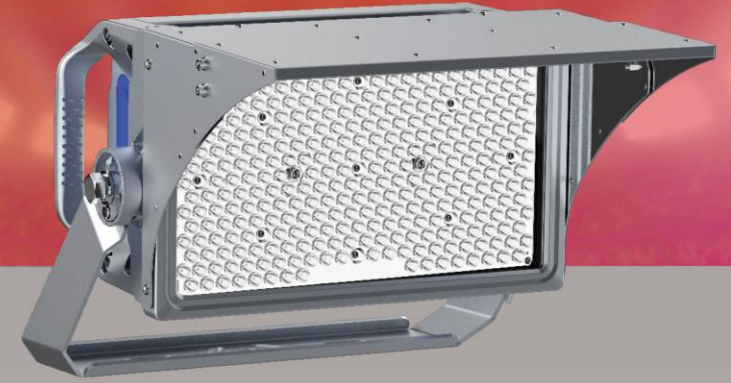

PART NO.	WATTAGE	DESCRIPTION	BEAM	EFFICACY	LUMENS	R4/CCT	WEIGHT (KG)	DIMENSIONS (MM)
FLD160 - D15	400	400W Roker Floodlight, 15°, 740	15°	140	16,200	740	19.5	480 x 545 x 338
FLD161 - D15	500	500W Roker Floodlight, 15°, 740	15°	140	56,000	740	19.5	480 x 545 x 338
FLD162 - D15	600	600W Roker Floodlight, 15°, 740	15°	140	84,000	740	19.5	480 x 545 x 338
FLD163 - D15	800	800W Roker Floodlight, 15°, 740	15°	140	112,000	740	38	891 x 549 x 338
FLD164 - D15	1000	1000W Roker Floodlight, 15°, 740	15°	140	149,000	740	38	891 x 549 x 338
FLD165 - D15	1200	1200W Roker Floodlight, 15°, 740	15°	140	168,000	740	38	891 x 549 x 338
FLD166 - D15	1600	1600W Roker Floodlight, 15°, 740	15°	140	224,000	740	52	977 x 522 x 338
FLD167 - D15	2000	2000W Roker Floodlight, 15°, 740	15°	140	280,000	740	52	977 x 522 x 338
FLD168 - D15	2400	2400W Roker Floodlight, 15°, 740	15°	140	336,000	740	52	977 x 522 x 338

• DISTRIBUTION

-D15	15 Degree
-D30	30 Degree
-D60	60 Degree
-D90	90 Degree
-D120	120 Degree

MAINS CONNECTION

-HV	415VAC Input
-RG	Remote Gear



Buy Better. Buy Venture.